

概述 Summary

- > 双组输出：功率50W
Dual output: power 50W
- > 输入电压：90 ~ 132VAC/180 ~ 264VAC 由开关切换
Input voltage: 90 ~ 132VAC/180 ~ 264VAC by switch





常见规格 General Specification

159 × 98 × 38mm

性能 Specification	型号 Model	D-50A		D-50B		D-50C		D-50F	
		CH1主回路	CH2次回路	CH1主回路	CH2次回路	CH1主回路	CH2次回路	CH1主回路	CH2次回路
直流输出电压、电流 DC output voltage, current		5V 0~6A	12V 0~2A	5V 0~6A	24V 0~1A	12V 1~2A	-12V 0.3~2A	12V 1~2A	24V 0.2~1A
纹波及噪音 Wave and noise		50mVp-p	80mVp-p	50mVp-p	100mVp-p	100mVp-p	100mVp-p	100mVp-p	120mVp-p
进线稳定度 Inlet wire stability		±0.5%	±1%	±0.5%	±1%	±1%	±1%	±1%	±1%
负载稳定度 Load stability		±0.5%	±4%	±0.5%	±1%	±0.5%	±5%	±0.5%	±8%
效率 Efficiency		73%		73%		73%		73%	
直流电压可调范围 Adjustable range for DC voltage		CH1: ±10%	CH2: ±5%	CH1: ±10%	CH2: ±5%	CH1: ±10%	CH2: ±10%	CH1: ±10%	CH2: ±10%
输入电压范围 Input voltage range		90 ~ 132VAC/180 ~ 264VAC 由开关切换 254 ~ 370VDC 47 ~ 63Hz 90 ~ 132VAC/180 ~ 264VAC by switch 254 ~ 370VDC 47 ~ 63Hz							
冲击电流 Impact current		冷启动电流 Cold start current 18A/115VAC 36A/230VAC							
过载保护 Overload protection		105% ~ 150%切断输出，自动恢复 105% ~ 150% cut off the output, automatic recovery							
过电压保护 Over voltage protection		CH1:115 ~ 135%关闭输出，电源重启后可恢复输出 CH1:115 ~ 135% shut down O/P voltage, re-power on to recover							
启动、上升、保持时间 Setup, rise, hold up time		200ms, 100ms, 30ms/230VAC 满负载 at full load							
耐压性 Withstand voltage		输入输出间：1.5kV 输入与外壳间：1.5kV 输出与外壳间：0.5kV 一分钟 I/P-O/P: 1.5kV I/P-FG:1.5kV O/P-FG: 0.5kV 1minute							
隔离电阻 Isolation resistance		输入输出间 输入与外壳间 输出与外壳间：500VDC/100MΩ I/P-O/P I/P-FG O/P-FG: 500VDC/100MΩ							
工作温度 Working temperature		-10℃ ~ +50℃							
尺寸 Dimension		159 × 98 × 38mm							
重量 Weight		0.55kg							
包装 Packing		34 × 32 × 24CM/30PCS/16.5kg							

外形尺寸 Overall dimension(mm)

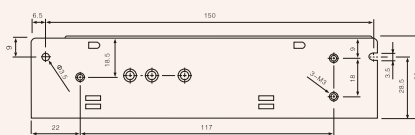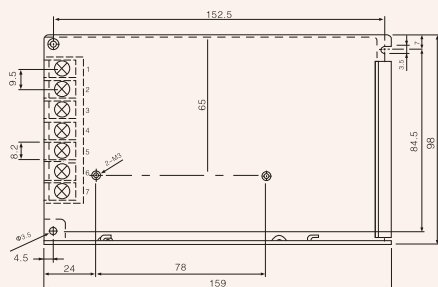

Terminal Pin.No Assignment

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4	DC OUTPUT+V2	7	DC OUTPUT+V1
2	AC/N	5	DC OUTPUTCOM2		
3	FG	6	DC OUTPUTCOM1		